

GREENBAUM, ROWE, SMITH,  
RAVIN, DAVIS & HIMMEL LLP

COUNSELLORS AT LAW

METRO CORPORATE CAMPUS ONE  
PO BOX 5600  
WOODBIDGE, NEW JERSEY 07095-0988  
(732) 549-5600  
TELECOPIER (732) 549-1881  
ABA NET 2529

DELIVERY ADDRESS:  
99 WOOD AVE. SOUTH  
ISELIN, NEW JERSEY 08830 2712

6 BECKER FARM RD.  
ROSELAND, NEW JERSEY 07068-1735  
(973) 535-1600  
TELECOPIER (973) 535-1698

June 4, 1999

REPLY TO

Hon. Commissioner of Patents and Trademarks  
Washington, DC 20231

Atty Dkt #: C-DIT-1806/FIESEL  
Inventor(s): Hans FIESEL  
Title: FREQUENCY CONVERTER FOR A TELEVISION SIGNAL

Dear Sir:

Enclosed herewith please find the following documents in the above-identified application for Letters Patent of the United States:

1 Pages of Abstract  
14 Pages of Specification  
20 Number of Claims  
1 Sheets of Drawings  
X Declaration, Power of Attorney  
X Express Mail Certification No. EJ527536374US  
X Priority Document- German Patent No. 198 25 455.5  
X Postcard Receipt - PLEASE PROVIDE FILING DATE AND SERIAL NO.

Check No. 1047 for \$760.00 calculated below:

Basic Fee	\$760.00
Additional Fees:	
Total claims (including multiple dependent claims) <u>20</u>	
Total claims in excess of 20 <u>0</u> X \$18.00	<u>0.00</u>
Independent claims <u>3</u>	
Independent claims over 3 <u>0</u> X \$78.00	<u>0.00</u>
Fee for multiple dependent claim(s) \$260.00	<u>0.00</u>
TOTAL FEES ENCLOSED	<u>\$760.00</u>

IF THERE ARE ANY FEES DUE AND OWING, PLEASE CHARGE DEPOSIT ACCOUNT  
NO. 50-0713.

Respectfully submitted,

ARTHUR L. PLEVY

ALP:sb

WM L GREENBAUM (1914-1983)  
ALLEN RAVIN (1957-1997)

ROBERT S GREENBAUM  
ARTHUR M GREENBAUM  
PAUL A ROWE  
WENDELL A SMITH  
ALAN E DAVIS  
DAVID L BRUCK  
MICHAEL B HIMMEL  
ARTHUR L PLEVY  
MICHAEL A BACKER  
DEAN A GAYER  
ROBERT C SCHACHTER  
MARTIN L LEPELSTAT  
DENNIS A ESTIS  
WILLIAM D GRAND  
BENJAMIN D LAMBERT, JR  
ALAN S WARD  
MARK H SOBEL  
HAL W MANDEL  
BARRY S GOODMAN  
PETER A BUCHSBAUM  
LAWRENCE P MAHER  
THOMAS J DENITZIO JR  
ROBERT S GOLDSMITH

JOHN D NORTH  
KENNETH T BILLS  
THOMAS C SENTER  
MARGARET GOODZEN  
ROBERT J KIPNEES  
W RAYMOND FELTON  
CHRISTINE F LI  
MERYL A G GONCHAL  
MICHAEL K FEINBERG  
CARLTON T SPILLER  
JAMES E PATTERSON  
JOSEPH M ORIOLO  
LLOYD H TUBMAN  
SABRINA A KOGLER  
JACQUELINE M PRINTZ  
MARJORIE F CHERTOK  
LAWRENCE H WERTHEIM  
DAVID B HIMELMAN  
GARY K WOLINETZ  
KEVIN T McNAMARA  
RICHARD L HERTZBERG  
ELLEN A SILVER  
ANDREA J SULLIVAN

DANIEL L GOLDEN, OF COUNSEL  
STEVEN S GOLDENBERG, OF COUNSEL  
NJ LEGISLATIVE AGENT  
SHERRYLL W KAUFMAN OF COUNSEL

ALLEN V BROWN  
ROBERT S UNDERHILL  
STEVEN FIRKSER  
SUSAN OKIN GOLDSMITH  
JAMES A MOHONEY  
JESSICA R MAYER  
ANNE DONLON MORRISON  
CHRISTINE F MARKS  
MARC D POLICASTRO  
DIANE V GARRITY  
JONATHAN W PHILIPP  
MARC J GROSS  
PAUL A SCHWARZ  
LUKE J KEALY  
CHRISTOPHER S PORRINO  
JEFFREY M SHAPIRO  
JODI L ROSENBERG  
MIA L STUART  
RICHARD L ELBERT

AARON R EASLEY  
JESSICA L KYLE  
KEITA ARCHIE YOUNG  
CIPORA S WINTERS  
MARCUS A BANKS  
DILIP B PATEL  
JODI S ELIGBERG  
EDWARD J HOWARD  
LORI A BERGER  
VICTORIA A KARLSON  
ROSEMARY CULCASI  
WILLIAM D BRICK  
RACHEL M COE  
KELLY M BROWN  
JONATHAN M DARCY  
EMILY A KALLER  
DEIRDRE M NAUGHTON  
BRIAN J WATERS  
ARREN S GOLDMAN  
ALAN A BORNSTEIN

FREQUENCY CONVERTER FOR A TELEVISION SIGNAL**Field of Invention**

5 The present invention relates to a frequency converter for processing television signals in the intermediate-frequency band for television sets, video recorders, PC cards, or set-top boxes for, e.g., satellite or cable reception, and further multimedia applications.

**Background of the Invention**

10 Television signals to be processed are, as a rule, assigned to different standards. They differ in the frequency separation and the levels of the picture carrier and the chrominance subcarrier. During transmission, the channel spacing may differ, too. In multistandard equipment or if quasi-split-sound processing is performed, this requires different surface-wave filters (SWFs) in the intermediate-frequency range for channel separation or, in the case of split-sound processing, for separating the video and

15

20

sound information in the respective channel. If the respective surface-wave filters are not exactly designed for the respective television standard and the respective transmission standard, and the selectivity skirt in the range of the adjacent picture carrier, the relatively high picture-carrier amplitude of the adjacent channel may show up as an interference signal both in the two sound carrier channels of the current television channel and in the picture. If the interfering picture carrier amplitude is large enough, it enters as a disturbance variable into the large-signal behavior of subsequent stages. In that case, the unavoidable non-linearity of a subsequent analog-to-digital converter is no longer negligible for the signal processing. Furthermore, the resolution of the analog-to-digital converter decreases since an essential portion of the available dynamic range is occupied by the signal amplitude of the adjacent picture carrier, whereby the number of quantization levels available for the desired signal is reduced.

Surface-wave filters, which, as a rule, cannot be fabricated together with monolithic integrated circuits,

represent separate components which increase the amount of external circuitry and the components count, particularly in multistandard equipment.

It is an object of the invention to reduce the additional external circuit complexity caused by the use of surface-wave filters, particularly in multistandard equipment, to a minimum.

#### Summary of Invention

A frequency converter for converting an intermediate-frequency television signal (s2) to a low frequency by means of a mixer (4) which is fed at its radio-frequency signal input (4.1) with the intermediate-frequency television signal (s2) via an intermediate-frequency filter (3) and at its local-oscillator-signal input (4.2) with a local-oscillator signal (u), the frequency of the local-oscillator signal (u) lying in the range of an adjacent picture carrier (NBT) which is defined by a channel spacing ( $k_0$ ;  $k_0^*$ ) and a respective television standard, and which after the frequency conversion is suppressed as a converted

adjacent picture carrier (NBT\*), or at least attenuated to a negligible residual amplitude, by means of a high-pass selectivity skirt (HP) of a filter device (5).

5

### **Brief Description of the Figures**

Fig. 1 illustrates a block diagram of a preferred embodiment of the frequency converter according to the invention which is particularly suited for multistandard operation;

Fig. 2 illustrates the frequency scheme of a typical television signal at the intermediate frequency; and

Fig. 3 illustrates the frequency scheme of the television signal of Fig. 2 at the low frequency following the second frequency conversion.

### **Detailed Description of the Invention**

This object is attained essentially by the use of a universal intermediate-frequency filter whose bandwidth is sufficiently great for all television and

transmission standards. As a result, part of the interfering adjacent picture carrier may still be present in the desired television channel. The interfering adjacent picture carrier is subsequently converted by suitable frequency conversion of the entire universal intermediate frequency filter output signal to a low frequency band, where it is either completely eliminated by means of an analog high-pass filter or at least reduced to the point that it cannot interfere with the subsequent signal processing.

The second frequency conversion of the intermediate-frequency signal is performed by an analog frequency converter which converts the entire television signal to a low frequency by means of a mixer. For the local-oscillator signal, a frequency is chosen which is identical with the frequency of the interfering adjacent picture carrier or at least is located in the vicinity thereof, so that after the frequency conversion, the interfering adjacent picture carrier is located near the frequency origin and can be removed from the television signal or at least be sufficiently attenuated by means of a high-pass selectivity skirt of an analog filter

device.

5       The second frequency conversion has an added  
advantage in that the signal frequencies to be processed  
are very low, which is favorable for the subsequent  
digital processing. The local conversion of the  
adjacent picture carrier, which is located at  
approximately 30 MHz, places no increased requirements  
on the mixer, which can be operated with a quantized  
local-oscillator signal, in the simplest case a square-  
10       wave signal, because the first produced harmonic of the  
mixing process is located at approximately 60 MHz, while  
after the second frequency conversion the desired-signal  
components of the current television channel extend only  
to approximately 10 MHz. Thus it is readily possible to  
15       suppress these and higher harmonics using a suitable  
low-pass filter, which may form part of the analog  
filter device mentioned above. Hence, advantages are  
gained by the second frequency conversion even without  
the use of a universal intermediate-frequency filter and  
20       without the requirement of multistandard operation.

The local-oscillator signal may differ in frequency  
from the interfering adjacent picture carrier, but this

frequency offset must be sufficiently small compared to the cutoff frequency of the high-pass filter, so that the selectivity skirt of the latter can sufficiently reduce the adjacent picture carrier in amplitude. In multistandard equipment, the local oscillator coupled to the mixer is a frequency-controlled oscillator (VCO or DCO) with an associated control unit. Advantageously, the frequency is set at a predetermined value by means of a phase-locked loop (PLL). Whether the oscillator is designed as a ring oscillator, a digitally controlled oscillator, an RC oscillator, or a sawtooth oscillator with an integrating stage depends on the required accuracy and on the available circuit technology. If the processing after the analog filter device is digital, a crystal-stabilized system clock will generally be present, which then serves as a frequency reference for the PLL.

The invention and further advantageous features thereof will now be explained in greater detail with reference to the accompanying drawings, in which the block diagram of Fig. 1 shows the frequency converter according to the invention in a typical application with



preceding and succeeding circuit elements which correspond, for example, to a television receiver with digital signal processing. A tuner receives a radio-frequency television signal s1 via an antenna 2, converts it to an intermediate frequency, and feeds its output as a television signal s2 to a universal intermediate-frequency filter 3. This intermediate-frequency filter 3 need not provide the high selectivity of conventional intermediate-frequency filters, but the invention allows the use of a less selective universal intermediate-frequency filter which can also be implemented with a surface-wave filter.

The output s3 of the intermediate-frequency filter 3 is fed to a mixer 4 followed by an analog filter device 5 with bandpass characteristics. The analog filter device 5 has a high-pass selectivity skirt HP located near the frequency origin. This skirt, however, provides relatively high attenuation already at the frequency of the converted adjacent picture carrier NBT\*. Advantageously, the filter device 5 also has a low-pass characteristic for higher frequencies, because

then the residues of the adjacent channels are attenuated or suppressed. Also suppressed are harmonics which are generated by nonlinearities of the mixer 4, particularly if the local-oscillator signal  $u$  is a square-wave signal with the values  $+1$  and  $-1$ . In that case, the mixer 4 will only contain an analog inverting stage for the television signal  $s_3$  at the radio-frequency signal input 4.1. After the filter device 5, the interfering signal components are small enough, so that the desired television signal  $s_5$  can be separated into its components. This can be done using analog or digital circuitry. In the embodiment of Fig. 1, the television signal  $s_5$  at the low frequency is digitized by means of an analog-to-digital converter 6 and forms a data stream  $s_6$ . The conversion clock  $cd$  comes from a system clock generator 7.

The analog-to-digital converter, which has a resolution of, e.g., 10 bits, is followed by a digital television-signal-processing circuit 12 which is coupled to a screen 13 and a pair of loudspeakers 14, 15 for picture and sound reproduction. The digital television-signal-processing circuit 12 includes the usual digital

filter circuits, which are precisely tuned to the respective video and sound channels to permit exact signal separation and demodulation of the individual signal components.

5           The invention moves the selective circuitry from the external intermediate-frequency SWF toward the subsequent circuit, which is implemented, at least in essential parts, using monolithic integrated circuit technology. Suitable IC input interfaces 16, 17 are  
10           given in Fig. 1. If analog and digital functional units can be implemented together in the monolithic integrated circuit, the interface 16 will be of advantage. In that case, the RF signal input 4.1 of the mixer 4 will also form the IC signal input. If the resolution of the  
15           analog-to-digital converter 6 is high enough, the video and sound signals in the common data stream s6 can be separated in the signal processing circuit 12 purely digitally. Then, separate digitization of the previously separated video and sound signals by the  
20           conventional split-sound methods is not necessary.

          The local-oscillator-signal input 4.2 of the mixer 4 is fed with the signal u from a local oscillator 8.

If different frequencies are required for the local-oscillator signal  $u$  in multistandard equipment, the local oscillator 8 will be frequency-controllable and be incorporated in a PLL. The associated control signals  $po$  - digital control signals in Fig. 1 - come from a control unit 9, e.g. a microprocessor, which also provides control signals  $pt$  for the tuner 1. The control information is retrieved as channel data  $pm$  from a memory 10 according to the channel to be selected and the associated television standard. For the local oscillator 8, in Fig. 1 a digitally controlled oscillator (DCO), the crystal-stabilized system clock  $cl$  represents the reference frequency, which is locked to the frequency of the respective local-oscillator signal  $u$  via the PLL.

Fig. 2 shows schematically the typical signal spectrum at the output of the tuner 1 for a television signal  $s2$  according to standard G at the intermediate frequency. The current channel  $k_0$  extends from approximately 33 MHz to 40 MHz and contains the picture carrier  $BT$  at 38.9 MHz, the chrominance subcarrier  $FT$  at 34.47 MHz, the first sound carrier  $TT1$  at 33.4 MHz, and

the second sound carrier TT2 at 33.16 MHz. The adjacent picture carrier NBT of the next lower channel  $k_{-1}$ , which is located at 30.9 MHz, i.e., in the vicinity of the two sound carriers TT1 and TT2, is critical for the sound channel processing. The response curve of an ideal intermediate-frequency filter ZF1, which covers only the signal components of the current channel  $k_0$ , is shown schematically in Fig. 2. The response curve ZF2 of the universal intermediate-frequency filter 3 is much less selective, as it covers parts of the adjacent picture carrier NBT of the next lower channel  $k_{-1}$  and the first and second adjacent sound carriers NTT1, NTT2 of the next higher channel  $k_1$ . The influence of these adjacent sound carriers on picture reproduction is less critical than the influence of the adjacent picture carrier NBT on the current channel  $k_0$ . Reference is made to European Standard EN 55020 of 1994, "Störfestigkeit von Rundfunkempfängern und verwandten Geräten der Unterhaltungselektronik", which specifies that the interfering adjacent picture carrier NBT must exceed the picture carrier BT by even 3 dB. The bandwidth of the universal intermediate-frequency filter

3 or ZF2 is approximately 8 MHz, so that the signal contents of all transmission standards (B/G, D/K, I, M/N, L/L') are passed. From the example of Fig. 2 it is apparent that the filter curve ZF2 attenuates undesired adjacent-channel components  $k_1$ ,  $k_{-1}$  insufficiently.

Fig. 3 shows the frequency spectrum of the television signal  $s_4$  after the second frequency conversion, which, as in the frequency scheme of Fig. 2, is performed with a local-oscillator signal  $u$  located as close to 30.9 MHz as possible. In the example shown, the frequency offset  $df$  of the local-oscillator signal  $u$  from the adjacent picture carrier NBT is 300 kHz. The converted current television channel  $k_0^*$  extends between approximately 2 MHz and 10 MHz. The interfering adjacent picture carrier NBT\* is located at 300 kHz, corresponding to the 300-kHz frequency offset of the local-oscillator signal  $u$ , and can be largely suppressed by means of a high-pass selectivity skirt HP of low order, whose cutoff frequency  $f_g$  in the example shown is 1 MHz. The interfering harmonics at 60 MHz can be suppressed by means of a low-pass selectivity skirt TP1 below 60 MHz. It would be optimal if the low-pass

selectivity skirt were located so low as to pass only the current channel  $k_0^*$ , cf. the ideal low-pass selectivity skirt TP2 shown in Fig. 3. This steep selectivity skirt TP2 is not necessary, however. It is essential that the low-pass selectivity skirt TP1 or TP2 does not yet attenuate the current channel  $k_0^*$ , particularly if the implementation of the Nyquist slope in the case of the picture carrier BT is reserved for subsequent stages.

Although the invention has been described in a preferred form with a certain degree of particularity, it is understood that the present disclosure of the preferred form has been made only by way of example, and that numerous changes in the details of construction and combination and arrangement of parts may be made without departing from the spirit and scope of the invention as hereinafter claimed. It is intended that the patent shall cover by suitable expression in the appended claims, whatever features of patentable novelty exist in the invention disclosed.

## CLAIMS

## We Claim:

1. A frequency converter for converting an intermediate-frequency television signal (s2) to a low frequency by means of a mixer (4) which is fed at its radio-frequency signal input (4.1) with the intermediate-frequency television signal (s2) via an intermediate-frequency filter (3) and at its local-oscillator-signal input (4.2) with a local-oscillator signal (u), the frequency of the local-oscillator signal (u) lying in the range of an adjacent picture carrier (NBT) which is defined by a channel spacing ( $k_0$ ;  $k_0^*$ ) and a respective television standard, and which after the frequency conversion is suppressed as a converted adjacent picture carrier (NBT\*), or at least attenuated to a negligible residual amplitude, by means of a high-pass selectivity skirt (HP) of a filter device (5).

2. The frequency converter of claim 1, wherein the frequency offset (df) of the local-oscillator signal (u)



from the adjacent picture carrier (NBT) is less than the high-pass cutoff frequency (fg) of the filter device (5).

3. The frequency converter of claim 2, wherein the mixer (4) is fed at the local-oscillator-signal input (4.2) with a quantized local-oscillator signal (u), and that the harmonics produced by the mixer (4) are suppressed in the television signal (s4) by means of a low-pass selectivity skirt (TP1, TP2) of the filter device (5).

4. The frequency converter of claim 3, wherein the local-oscillator signal (u) is a square-wave signal, particularly a signal having the values +1 and -1.

5. The frequency converter of claim 1, wherein the local-oscillator-signal input (4.2) is fed from a digitally controlled oscillator (8) whose frequency is determined by control signals (po) from a control unit (9) according to the respective television standard or the respective channel spacing.

6. The frequency converter of claim 1, wherein after the filter device (5), the television signal (s5) is digitized for the further signal processing by means of an analog-to-digital converter (6).

7. A frequency converter for converting an intermediate-frequency television signal (s2) to a low frequency comprising:

a mixer having first and second inputs and an output;

a first filter being coupled to said first input of said mixer and adapted to provide an intermediate-frequency television signal (s2) thereto;

an oscillator coupled to said second input of said mixer and adapted to provide an oscillator-signal (u) lying in a range of an adjacent picture carrier (NBT) which is defined by a channel spacing ( $k_0$ ;  $k_0^*$ ) and a respective television standard; and,

a second filter coupled to said output of said mixer for attenuating said adjacent picture carrier to a negligible residual amplitude.

8. The frequency converter of claim 7, wherein a frequency offset ( $df$ ) of the local-oscillator signal ( $u$ ) from the adjacent picture carrier (NBT) is less than a high-pass cutoff frequency ( $fg$ ) of the second filter.

9. The frequency converter of claim 8, wherein the mixer is fed at the second input with a quantized local-oscillator signal ( $u$ ), and harmonics produced by the mixer are suppressed in a television signal by means of a low-pass selectivity skirt of the second filter.

10. The frequency converter of claim 9, wherein the local-oscillator signal ( $u$ ) is a square-wave signal, having the values  $+1$  and  $-1$ .

11. The frequency converter of claim 7, further comprising a control unit coupled to said oscillator, wherein the oscillator is digitally controlled by said control unit according to a respective television standard or respective channel spacing.

12. The frequency converter of claim 7, further

comprising digitizing means coupled to said second filter, said digitizing means for digitizing a television signal for further signal processing by means of an analog-to-digital converter.

13. A method for processing an intermediate-frequency television signal comprising the steps of:

filtering an intermediate-frequency signal with a first filter;

generating an oscillator signal (u);

mixing said filtered intermediate-frequency signal and said oscillator signal (u);

filtering said mixed signals using a second filter having a high-pass selectivity skirt located near the frequency origin and a low-pass characteristic for higher frequencies; and,

separating said high-pass selectivity skirt filtered signal into visual and audible components for reproduction.

14. The method of Claim 13, wherein said first filter comprises a surface-wave filter.

15. The method of Claim 13, wherein a frequency offset (df) of the oscillator signal (u) from an adjacent picture carrier (NBT) is less than a high-pass cutoff frequency of the second filter.

16. The method of claim 15, wherein said oscillator signal (u) is quantized, and further comprising the step of suppressing harmonics produced by said mixing using a low-pass selectivity skirt of the second filter.

17. The method of claim 16, wherein the oscillator signal u is a square-wave signal having values +1 and -1.

18. The method of claim 13, further comprising the step of digitizing said high-pass selectivity skirt filtered signal.

19. The method of Claim 13, further comprising controlling said oscillator signal (u) with a control device, wherein said oscillator signal (u) is digitally controlled according to a respective television standard

or respective channel spacing.

20. The method of Claim 13, further comprising the step of feeding said oscillator signal (u) from a digitally controlled oscillator whose frequency is determined by control signals (po) from a control unit according to a respective television standard or respective channel spacing.

**Abstract**

A frequency converter for converting an intermediate-frequency television signal (s2) to a low frequency by means of a mixer (4) which is fed at its radio-frequency signal input (4.1) with the intermediate-frequency television signal (s2) via an intermediate-frequency filter (3) and at its local-oscillator-signal input (4.2) with a local-oscillator signal (u), the frequency of the local-oscillator signal (u) lying in the range of an adjacent picture carrier (NBT) which is defined by the channel spacing ( $k_0$ ;  $k_0^*$ ) and the respective television standard, and which after the frequency conversion is suppressed as a converted adjacent picture carrier (NBT\*), or at least attenuated to a negligible residual amplitude, by means of a high-pass selectivity skirt (HP) of a filter device (5).

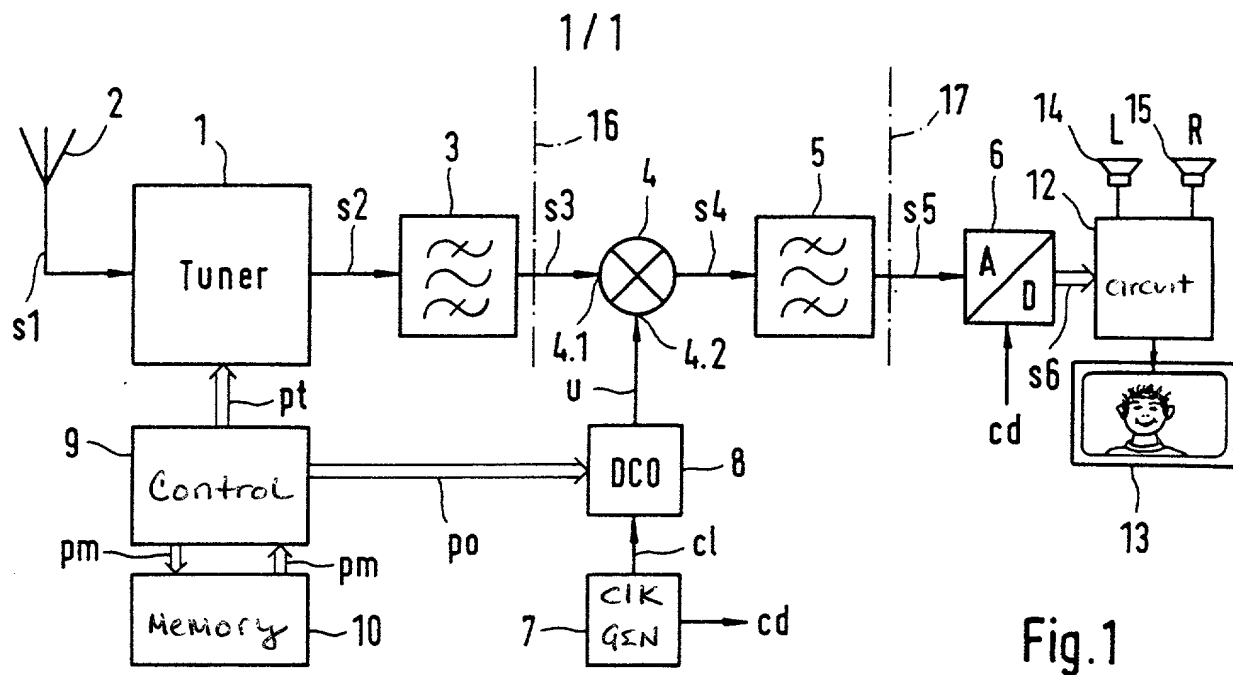


Fig.1

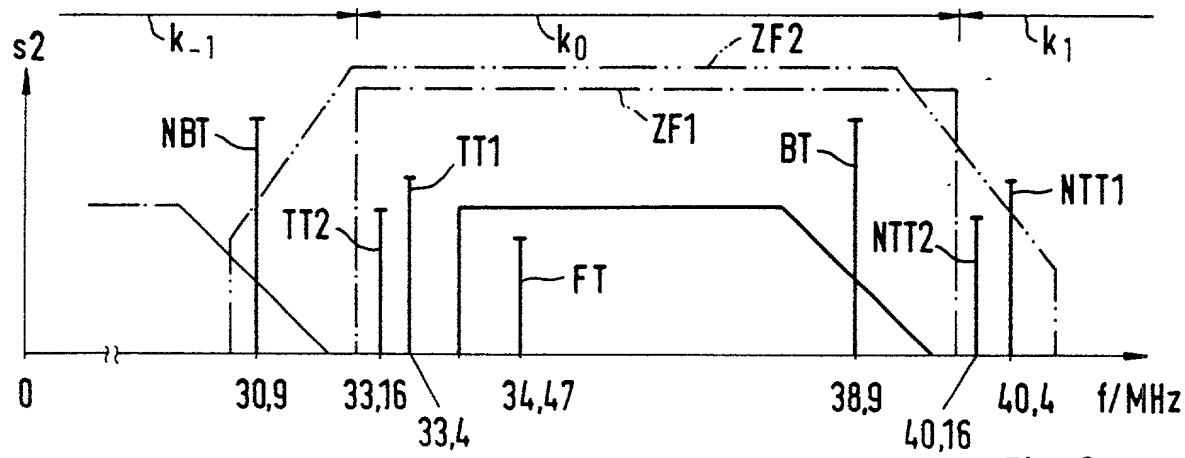


Fig.2

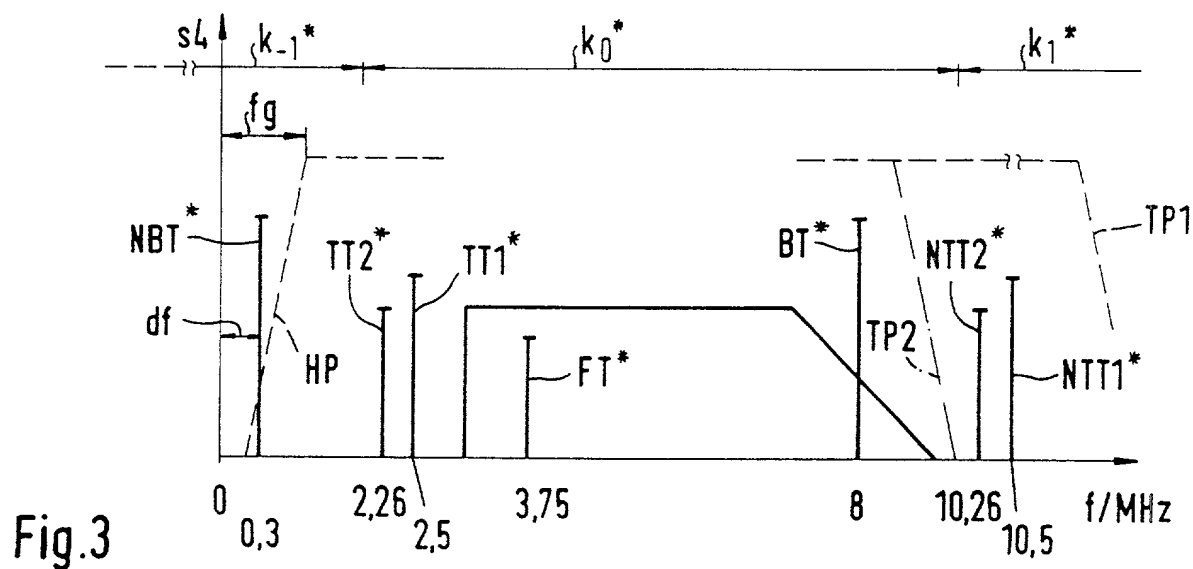


Fig.3



**DECLARATION AND POWER OF ATTORNEY**  
(Patent, Design or C-I-P Application)

As a below-named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are stated below) of the subject matter which is claimed and for which a patent is sought on the invention entitled: FREQUENCY CONVERTER FOR A TELEVISION SIGNAL the specification of which

X is attached hereto

— was filed on \_\_\_\_\_ as Application Serial No. \_\_\_\_\_ and was amended on \_\_\_\_\_  
(if applicable)

I hereby state that I have reviewed and understand the contents of the above-entitled specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations §1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed.

**PRIOR FOREIGN APPLICATION(S)**

COUNTRY	APPLICATION NO.	DATE OF FILING (day, month, year)	PRIORITY CLAIMED UNDER 35 U.S.C. 119
GERMANY	198 25 455.5-31	JUNE 6, 1998	YES <u>X</u> NO

LISTING OF FOREIGN APPLICATIONS CONTINUED ON PAGE 2 HEREOF: YES \_\_\_ NO X

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first page of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application

(Application Serial No.) \_\_\_\_\_ (Filing Date) \_\_\_\_\_ (Status)  
(patented, pending, abandoned)

**POWER OF ATTORNEY:** As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

ARTHUR L. PLEVY, Reg. No. 24,277; EDWARD J. HOWARD, Reg. No. 42,670; JONATHAN M. DARCY, P. Reg. No. 44,054; ALAN A. BORNSTEIN, Reg. No. 40,919; and PAUL A. SCHWARZ, Reg. No. 37577

SEND CORRESPONDENCE TO: Arthur L. Plevy, Esq.  
GREENBAUM, ROWE, SMITH, RAVIN, DAVIS &  
HIMMEL LLP  
P.O. Box 5600  
Woodbridge, NJ 07095-0988

DIRECT TELEPHONE Arthur L. Plevy, Esq.  
CALLS TO: (732) 549-5600

FULL NAME OF INVENTOR #1	LAST NAME: <b>FIESEL</b>	FIRST NAME: <b>HANS</b>	MIDDLE NAME:
RESIDENCE & CITIZENSHIP	CITY: <b>GLOTTERTAL</b>	STATE OR FOREIGN COUNTRY: <b>GERMANY</b>	COUNTRY OF CITIZENSHIP: <b>GERMANY</b>
POST OFFICE ADDRESS	POST OFFICE ADDRESS: <b>LEIMENECKSTRASSE 8d</b>	CITY: <b>GLOTTERTAL</b>	STATE OR COUNTRY AND ZIP CODE: <b>GERMANY D-79286</b>
FULL NAME OF INVENTOR #2	LAST NAME:	FIRST NAME:	MIDDLE NAME:
RESIDENCE & CITIZENSHIP	CITY:	STATE OR FOREIGN COUNTRY:	COUNTRY OF CITIZENSHIP:
POST OFFICE ADDRESS	POST OFFICE ADDRESS:	CITY:	STATE OR COUNTRY AND ZIP CODE:
FULL NAME OF INVENTOR #3	LAST NAME:	FIRST NAME:	MIDDLE NAME:
RESIDENCE & CITIZENSHIP	CITY:	STATE OR FOREIGN COUNTRY:	COUNTRY OF CITIZENSHIP:
POST OFFICE ADDRESS	POST OFFICE ADDRESS:	CITY:	STATE OR COUNTRY AND ZIP CODE:

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Signature of Inventor #1	Signature of Inventor #2	Signature of Inventor #3
Date:	Date:	Date: